

FAA APPROVED SUPPLEMENT  
TO THE  
PILOT'S OPERATING HANDBOOK AND  
FAA APPROVED AIRPLANE FLIGHT MANUAL

FOR


CESSNA MODELS 172N, S/N 17271035 THRU 17274009

REG. NO. N3021E

SER. NO. 17271405

This Supplement must be attached to the Pilot's Operating Handbook (POH) and FAA Approved Airplane Flight Manual when the aircraft is modified by the installation of an O-320-D series engine and the gross weight is increased to 2400 lbs in accordance with STC # SA1356GL. The information contained herein supplements or supersedes the basic manual only in those areas listed. For limitations, procedures and performance information not contained in this supplement, consult the basic POH and FAA Approved Airplane Flight Manual.

FAA APPROVED:

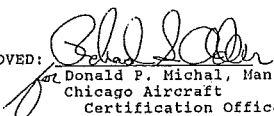  
Donald P. Michal, Manager  
Chicago Aircraft  
Certification Office  
FAA Central Region

DATE: MAR 01 1999

Page 1 of 11

Penn Yan Aero Service, Inc.  
2499 Bath Road, Airport  
Penn Yan, NY 14527-9599

POH and AFM Supplement  
for Cessna 172N

SECTION I - General

DESCRIPTIVE DATA

A. Engine

Number of engines: 1  
Engine Manufacturer: Textron Lycoming  
Engine Model: O-320-D2J, -D2G, -D1A  
Horsepower Rating and Speed: 160 rated BHP at 2700 RPM

SECTION II - Limitations

- A. The following placard must be displayed adjacent to the flap position selector switch:

MAXIMUM FLAP TRAVEL IS 30°

B. C.G. Range

Landplane:

Normal category	(+39.5) to (+47.3) at 2400 lb.
	(+35.0) to (+47.3) at 1950 lb. or less
Utility category	(+36.5) to (+40.5) at 2100 lb.
	(+35.0) to (+40.5) at 1950 lb. or less

Floatplane: (Edo 89-2000 or 89A2000 floats)

Normal category	(+39.8) to (+45.5) at 2220 lb.
	(+36.4) to (+45.5) at 1825 lb. or less

Straight line variation between points given.

SECTION III - Emergency Procedures - No Change.

SECTION IV - Normal Procedures - No Change.

SECTION V - Performance - See pages 3 thru 10.

SECTION VI - Weight and Balance - See Page 11.

FAA APPROVED

DATE: MAR 01 1989

CESSNA  
MODEL 172N

Aircraft Modified  
Per Penn Yan STC  
2400 lb. gross wt.

SECTION 5  
PERFORMANCE

MAR 01 1989

**CRUISE**

The cruising altitude should be selected based on a consideration of trip length, winds aloft, and the airplane's performance. A typical cruising altitude and the expected wind enroute have been given for this sample problem. However, the power setting selection for cruise must be determined based on several considerations. These include the cruise performance characteristics presented in figure 5-8, the range profile charts presented in figure 5-9, and the endurance profile charts presented in figure 5-10.

The relationship between power and range is illustrated by the range profile charts. Considerable fuel savings and longer range result when lower power settings are used. For this sample problem, a cruise power of approximately 65% will be used.

The cruise performance chart, figure 5-8, is entered at 6000 feet altitude and 20°C above standard temperature. These values most nearly correspond to the planned altitude and expected temperature conditions. The engine speed chosen is 2500 RPM, which results in the following:

Power	66%
True airspeed	112 Knöts
Cruise fuel flow	7.4 GPH

The power computer may be used to determine power and fuel consumption more accurately during the flight.

**FUEL REQUIRED**

The total fuel requirement for the flight may be estimated using the performance information in figures 5-7 and 5-8. For this sample problem, figure 5-7 shows that a climb from 2000 feet to 6000 feet requires 1.6 gallons of fuel. The corresponding distance during the climb is 10 nautical miles. These values are for a standard temperature and are sufficiently accurate for most flight planning purposes. However, a further correction for the effect of temperature may be made as noted on the climb chart. The approximate effect of a non-standard temperature is to increase the time, fuel, and distance by 10% for each 10°C above standard temperature, due to the lower rate of climb. In this case, assuming a temperature 16°C above standard, the correction would be:

$$\frac{16^{\circ}\text{C}}{10^{\circ}\text{C}} \times 10\% = 16\% \text{ Increase}$$

Penn Yan Aero Supplemental Airplane Flight Manual & Installation Instructions for the DeltaHawk STC SA-1356GL

Si ON 5  
PERFORMANCE

Aircraft Modified  
Per Penn Yan STC  
2400 lb. gross wt.

CESSNA  
MODEL 172N

With this factor included, the fuel estimate would be calculated as follows:

Fuel to climb, standard temperature	1.6
Increase due to non-standard temperature (1.6 x 16%)	<u>0.3</u>
Corrected fuel to climb	1.9 Gallons

Using a similar procedure for the distance to climb results in 12 nautical miles.

The resultant cruise distance is:

Total distance	320
Climb distance	<u>-12</u>
Cruise distance	308 Nautical Miles

With an expected 10 knot headwind, the ground speed for cruise is predicted to be:

112
<u>-10</u>
102 Knots

Therefore, the time required for the cruise portion of the trip is:

$$\frac{308 \text{ Nautical Miles}}{102 \text{ Knots}} = 3.0 \text{ Hours}$$

The fuel required for cruise is:

$$3.0 \text{ hours} \times 7.4 \text{ gallons/hour} = 22.2 \text{ Gallons}$$

A 45-minute reserve requires:

$$\frac{45}{60} \times 7.4 \text{ gallons/hour} = 5.6 \text{ Gallons}$$

The total estimated fuel required is as follows:

Engine start, taxi, and takeoff	1.1
Climb	1.9
Cruise	22.2
Reserve	<u>5.6</u>
Total fuel required	30.8 Gallons

Once the flight is underway, ground speed checks will provide a more accurate basis for estimating the time enroute and the corresponding fuel

MAR 0 1 1989

CESSNA  
MODEL 172N

Aircraft Modified  
Per Penn Yan STC  
2400 lb. gross wt.

SECTION 5  
PERFORMANCE

required to complete the trip with ample reserve.

**LANDING**

A procedure similar to takeoff should be used for estimating the landing distance at the destination airport. Figure 5-11 presents landing distance information for the short field technique. The distances corresponding to 2000 feet and 30°C are as follows:

Ground roll	610 Feet
Total distance to clear a 50-foot obstacle	1390 Feet

A correction for the effect of wind may be made based on Note 2 of the landing chart using the same procedure as outlined for takeoff.

**DEMONSTRATED OPERATING TEMPERATURE**

Satisfactory engine cooling has been demonstrated for this airplane with an outside air temperature 23°C above standard. This is not to be considered as an operating limitation. Reference should be made to Section 2 for engine operating limitations.

**AIRSPED CALIBRATION**

**NORMAL STATIC SOURCE**

**CONDITION:**

Power required for level flight or maximum rated RPM dive.

FLAPS UP		50	60	70	80	90	100	110	120	130	140	150	160
KIAS		50	60	70	80	90	100	110	120	130	140	150	160
KCAS		56	62	70	79	89	98	107	117	126	135	145	154
FLAPS 10°		40	50	60	70	80	90	100	110	---	---	---	---
KIAS		40	50	60	70	80	90	100	110	---	---	---	---
KCAS		49	55	62	70	79	89	98	108	---	---	---	---
FLAPS 30°		40	50	60	70	80	85	---	---	---	---	---	---
KIAS		40	50	60	70	80	85	---	---	---	---	---	---
KCAS		47	53	61	70	80	84	---	---	---	---	---	---

Figure 5-1. Airspeed Calibration (Sheet 1 of 2)

Penn Yan Aero Supplemental Airplane Flight Manual & Installation Instructions for the DeltaHawk STC SA-13566L

Page 3 of 11

SECTION 5  
PERFORMANCE

Aircraft Modified  
Per Penn Yan STC  
2400 lb. gross wt.

CESSNA  
MODEL 172N

**AIRSPEED CALIBRATION  
ALTERNATE STATIC SOURCE**

**HEATER/VENTS AND WINDOWS CLOSED**

FLAPS UP												
NORMAL KIAS	50	60	70	80	90	100	110	120	130	140	---	---
ALTERNATE KIAS	51	61	71	82	91	101	111	121	131	141	---	---
FLAPS 10°												
NORMAL KIAS	40	50	60	70	80	90	100	110	---	---	---	---
ALTERNATE KIAS	40	51	61	71	81	90	99	108	---	---	---	---
FLAPS 30°												
NORMAL KIAS	40	50	60	70	80	85	---	---	---	---	---	---
ALTERNATE KIAS	38	50	60	70	79	83	---	---	---	---	---	---

**HEATER/VENTS OPEN AND WINDOWS CLOSED**

FLAPS UP												
NORMAL KIAS	40	50	60	70	80	90	100	110	120	130	140	---
ALTERNATE KIAS	36	48	59	70	80	89	99	108	118	128	139	---
FLAPS 10°												
NORMAL KIAS	40	50	60	70	80	90	100	110	---	---	---	---
ALTERNATE KIAS	38	49	59	69	79	88	97	106	---	---	---	---
FLAPS 30°												
NORMAL KIAS	40	50	60	70	80	85	---	---	---	---	---	---
ALTERNATE KIAS	34	47	57	67	77	81	---	---	---	---	---	---

**WINDOWS OPEN**

FLAPS UP												
NORMAL KIAS	40	50	60	70	80	90	100	110	120	130	140	---
ALTERNATE KIAS	26	43	67	70	82	93	103	113	123	133	143	---
FLAPS 10°												
NORMAL KIAS	40	50	60	70	80	90	100	110	---	---	---	---
ALTERNATE KIAS	25	43	57	69	80	91	101	111	---	---	---	---
FLAPS 30°												
NORMAL KIAS	40	50	60	70	80	85	---	---	---	---	---	---
ALTERNATE KIAS	25	41	54	67	78	84	---	---	---	---	---	---

Figure 5-1. Airspeed Calibration (Sheet 2 of 2)

SECTION 5  
PERFORMANCE

Aircraft Modified  
Per Penn Yan STC  
2400 lb. gross wt.

CESSNA  
MODEL 172N

**STALL SPEEDS**

MAR 01 1989

CONDITIONS:  
Power Off

- NOTES:  
1. Altitude loss during a stall recovery may be as much as 230 feet.  
2. KIAS values are approximate.

**MOST REARWARD CENTER OF GRAVITY**

WEIGHT LBS	FLAP DEFLECTION	ANGLE OF BANK							
		0°		30°		45°		60°	
		KIAS	KCAS	KIAS	KCAS	KIAS	KCAS	KIAS	KCAS
2400	UP	44	51	47	55	52	61	62	72
	10°	35	48	38	52	42	57	49	68
	30°	33	46	35	49	39	55	47	65

**MOST FORWARD CENTER OF GRAVITY**

WEIGHT LBS	FLAP DEFLECTION	ANGLE OF BANK							
		0°		30°		45°		60°	
		KIAS	KCAS	KIAS	KCAS	KIAS	KCAS	KIAS	KCAS
2400	UP	44	52	47	56	52	62	62	74
	10°	37	49	40	53	44	58	52	69
	30°	33	46	35	49	39	55	47	65

Figure 5-3. Stall Speeds

PERFORMANCE

Aircraft Modified CESSNA  
 Per Penn Yan STC MODEL 172N  
 2400 lb. gross wt.

**TAKEOFF DISTANCE**  
**MAXIMUM WEIGHT 2400 LBS**  
**SHORT FIELD**

CONDITIONS:  
 Flaps 10°  
 Full Throttle Prior to Brake Release  
 Paved, Level, Dry Runway  
 Zero Wind

- NOTES:
1. Short field technique as specified in Section 4.
  2. Prior to takeoff from fields above 3000 feet elevation, the mixture should be leaned to give maximum RPM in a full throttle, static runup.
  3. Decrease distances 10% for each 9 knots headwind. For operation with tailwinds up to 10 knots, increase distances by 10% for each 2 knots.
  4. For operation on a dry, grass runway, increase distances by 15% of the "ground roll" figure.

WEIGHT LBS	TAKEOFF SPEED KIAS		PRESS ALT FT	0°C			10°C			20°C			30°C			40°C		
	LIFT OFF	AT 50 FT		GRND ROLL FT	TOTAL FT TO CLEAR 50 FT OBS	GRND ROLL FT	TOTAL FT TO CLEAR 50 FT OBS	GRND ROLL FT	TOTAL FT TO CLEAR 50 FT OBS	GRND ROLL FT	TOTAL FT TO CLEAR 50 FT OBS	GRND ROLL FT	TOTAL FT TO CLEAR 50 FT OBS	GRND ROLL FT	TOTAL FT TO CLEAR 50 FT OBS			
2400	51	56	S.L. 1000 2000 3000 4000 5000 6000 7000 8000	795 875 960 1055 1165 1285 1425 1580 1755	1460 1605 1770 1960 2185 2445 2755 3140 3615	860 940 1035 1140 1260 1390 1540 1710 1905	1570 1725 1910 2120 2365 2660 3015 3450 4015	925 1015 1115 1230 1355 1500 1665 1850 2080	1685 1860 2060 2295 2570 2895 3300 3805 4480	995 1090 1200 1325 1465 1620 1800 2000 ---	1810 2000 2220 2480 2790 3160 3620 ---	1065 1170 1290 1425 1575 1745 1940 ---	1945 2155 2395 2685 3030 3455 3990 ---					

Figure 5-5. Takeoff Distance (Sheet 1 of 2)



SECTION 5  
PERFORMANCE

**TAKEOFF DISTANCE**  
**2200 LBS AND 2000 LBS**

**SHORT FIELD**

REFER TO SHEET 1 FOR APPROPRIATE CONDITIONS AND NOTES.

WEIGHT LBS	TAKEOFF SPEED KIAS		PRESS ALT FT	0°C		10°C		20°C		30°C		40°C	
	LIFT OFF	AT 50 FT		GRND ROLL FT	TOTAL FT TO CLEAR 50 FT OBS	GRND ROLL FT	TOTAL FT TO CLEAR 50 FT OBS	GRND ROLL FT	TOTAL FT TO CLEAR 50 FT OBS	GRND ROLL FT	TOTAL FT TO CLEAR 50 FT OBS	GRND ROLL FT	TOTAL FT TO CLEAR 50 FT OBS
2200	49	54	S.L.	650	1195	700	1280	750	1375	805	1470	865	1575
			1000	710	1310	765	1405	825	1510	885	1615	950	1735
			2000	780	1440	840	1545	905	1660	975	1785	1045	1915
			3000	855	1585	925	1705	995	1835	1070	1975	1150	2130
			4000	945	1750	1020	1890	1100	2040	1180	2200	1270	2375
			5000	1040	1945	1125	2105	1210	2275	1305	2465	1405	2665
	51	54	6000	1150	2170	1240	2355	1340	2555	1445	2775	1585	3020
			7000	1270	2440	1375	2655	1485	2890	1605	3155	1730	3450
			8000	1410	2760	1525	3015	1650	3305	1785	3630	1925	4005
			S.L.	525	970	565	1035	605	1110	650	1185	695	1265
			1000	570	1060	615	1135	665	1215	710	1295	765	1385
			2000	625	1160	675	1240	725	1330	780	1425	840	1525
2000	46	51	3000	690	1270	740	1365	800	1465	860	1570	920	1685
			4000	755	1400	815	1500	880	1615	945	1735	1015	1865
			5000	830	1545	900	1660	970	1790	1040	1925	1120	2070
			6000	920	1710	980	1845	1070	1990	1150	2145	1235	2315
			7000	1015	1800	1095	2055	1180	2225	1275	2405	1370	2605
			8000	1125	2125	1215	2305	1310	2500	1410	2715	1520	2950

MAR 0 1 1989

Figure 5-5. Takeoff Distance (Sheet 2 of 2) Page 5 of 11

Penn Yan Aero Supplemental Airplane Flight Manual & Installation Instructions for the Deltahawk, STC SA-1356GL

SECTION 5  
PERFORMANCE

Aircraft Modified  
Per Penn Yan STC  
2400 lb. gross wt.

CESSNA  
MODEL 172N

**MAXIMUM RATE OF CLIMB**

CONDITIONS:  
Flaps Up  
Full Throttle

NOTE:  
Mixture leaned above 3000 feet for maximum RPM.

WEIGHT LBS	PRESS ALT FT	CLIMB SPEED KIAS	RATE OF CLIMB - FPM			
			-20°C	0°C	20°C	40°C
2400	S.L.	76	805	745	685	625
	2000	75	695	640	580	525
	4000	74	590	535	480	420
	6000	73	485	430	375	320
	8000	72	380	330	275	220
	10,000	71	275	225	175	---
	12,000	70	175	125	---	---

Figure 5-6. Maximum Rate of Climb

MAR 0 1 1989

CESSNA  
MODEL 172N

Aircraft Modified  
Per Penn Yan STC  
2400 lb. gross wt.

SECTION 5  
PERFORMANCE

TIME, FUEL, AND DISTANCE TO CLIMB

MAXIMUM RATE OF CLIMB

CONDITIONS:  
Flaps Up  
Full Throttle  
Standard Temperature

NOTES:

1. Add 1.1 gallons of fuel for engine start, taxi and takeoff allowance.
2. Mixture leaned above 3000 feet for maximum RPM.
3. Increase time, fuel and distance by 10% for each 10°C above standard temperature.
4. Distances shown are based on zero wind.

WEIGHT LBS	PRESSURE ALTITUDE FT	TEMP °C	CLIMB SPEED KIAS	RATE OF CLIMB FPM	FROM SEA LEVEL		
					TIME MIN	FUEL USED GALLONS	DISTANCE NM
2400	S.L.	15	76	700	0	0.0	0
	1000	13	76	655	1	0.3	2
	2000	11	75	610	3	0.6	4
	3000	9	75	560	5	1.0	6
	4000	7	74	515	7	1.4	9
	5000	5	74	470	9	1.7	11
	6000	3	73	425	11	2.2	14
	7000	1	72	375	14	2.6	18
	8000	-1	72	330	17	3.1	22
	9000	-3	71	285	20	3.6	26
	10,000	-5	71	240	24	4.2	32
	11,000	-7	70	190	29	4.9	38
12,000	-9	70	145	35	5.8	47	

Figure 5-7. Time, Fuel, and Distance to Climb

Penn Yan Aero Supplemental Airplane Flight Manual & Installation Instructions for the DeltaHawk STC SA-1356GL

MAR 01 1989

SECTION 5  
PERFORMANCE

Aircraft Modified  
Per Penn Yan STC  
2400 lb. gross wt.

CESSNA  
MODEL 172N

CRUISE PERFORMANCE

CONDITIONS:  
2400 Pounds  
Recommended Lean Mixture (See Section 4, Cruise)

PRESSURE ALTITUDE FT	RPM	20°C BELOW STANDARD TEMP			STANDARD TEMPERATURE			20°C ABOVE STANDARD TEMP		
		% BHP	KTAS	GPH	% BHP	KTAS	GPH	% BHP	KTAS	GPH
2000	2500	---	---	---	76	114	8.5	72	114	8.1
	2400	72	110	8.1	69	109	7.7	65	108	7.3
	2300	65	104	7.3	62	103	6.9	59	102	6.6
	2200	58	99	6.6	55	97	6.3	53	96	6.1
	2100	52	92	6.0	50	91	5.8	48	89	5.7
4000	2550	---	---	---	76	117	8.5	72	116	8.1
	2500	77	115	8.6	73	114	8.1	69	113	7.7
	2400	69	109	7.8	65	108	7.3	62	107	7.0
	2300	62	104	7.0	59	102	6.6	57	101	6.4
	2200	56	98	6.3	54	96	6.1	51	94	5.9
2100	51	91	5.8	48	89	5.7	47	88	5.5	
6000	2600	---	---	---	77	119	8.6	72	118	8.1
	2500	73	114	8.2	69	113	7.8	66	112	7.4
	2400	66	108	7.4	63	107	7.0	60	106	6.7
	2300	60	103	6.7	57	101	6.4	55	99	6.2
	2200	54	96	6.1	52	95	5.9	50	92	5.8
2100	49	90	5.7	47	88	5.5	46	86	5.5	
8000	2650	---	---	---	77	121	8.6	73	120	8.1
	2600	77	119	8.7	73	118	8.2	69	117	7.8
	2500	70	113	7.8	66	112	7.4	63	111	7.1
	2400	63	108	7.1	60	106	6.7	58	104	6.5
	2300	57	101	6.4	55	100	6.2	53	97	6.0
2200	52	95	6.0	50	93	5.8	49	91	5.7	
10,000	2600	74	118	8.3	70	117	7.8	66	115	7.4
	2500	67	112	7.5	64	111	7.1	61	109	6.8
	2400	61	106	6.8	58	105	6.5	56	102	6.3
	2300	55	100	6.3	53	98	6.0	51	96	5.9
	2200	50	93	5.8	49	91	5.7	47	89	5.6
12,000	2650	67	114	7.5	64	112	7.1	61	111	6.9
	2500	64	111	7.2	61	109	6.8	59	107	6.6
	2400	59	105	6.6	56	103	6.3	54	100	6.1
	2300	53	98	6.1	51	96	5.9	50	94	5.8

Figure 5-8. Cruise Performance

Penn Yan Aero Supplemental Airplane Flight Manual & Installation Instructions for the Deltahawk STC SA-1356G1

JESSNA  
MODEL 172N

Aircraft Modified  
Per Penn Yan STC  
2400 lb. gross wt.

SECTION 5  
PERFORMANCE

### RANGE PROFILE 45 MINUTES RESERVE 40 GALLONS USABLE FUEL

CONDITIONS:  
2400 Pounds  
Recommended Lean Mixture for Cruise  
Standard Temperature  
Zero Wind

NOTE:  
This chart allows for the fuel used for engine start, taxi, takeoff and climb, and the distance during climb.

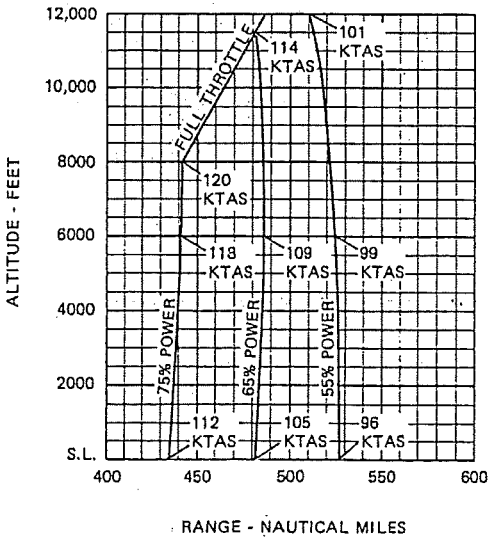


Figure 5-9. Range Profile (Sheet 1 of 3)

Performance

Aircraft Modified  
Per Penn Yan STC  
2400 lb. gross wt.

CESSNA  
MODEL 172N

### RANGE PROFILE 45 MINUTES RESERVE 50 GALLONS USABLE FUEL

CONDITIONS:  
2400 Pounds  
Recommended Lean Mixture for Cruise  
Standard Temperature  
Zero Wind

NOTE:  
This chart allows for the fuel used for engine start, taxi, takeoff and climb, and the distance during climb.

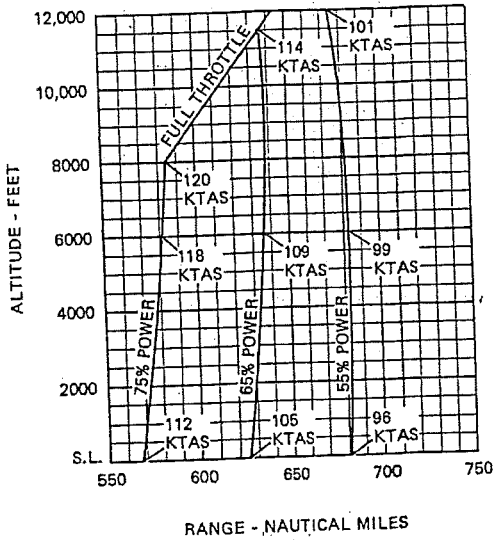


Figure 5-9. Range Profile (Sheet 2 of 3)

MAR 0 1 1989

SECTION 5  
PERFORMANCE

Aircraft Modified  
Per Penn Yan STC  
2400 lb. gross wt.

CESSNA  
MODEL 172N

**ENDURANCE PROFILE**  
45 MINUTES RESERVE  
40 GALLONS USABLE FUEL

CONDITIONS:  
2400 Pounds  
Recommended Lean Mixture for Cruise  
Standard Temperature

NOTE:  
This chart allows for the fuel used for engine start, taxi, takeoff and climb, and the time during climb.

Penn Yan Aero Supplemental Airplane Flight Manual & Installation Instructions for the DeltaHawk STC SA-1356GL

Page 9 of 11

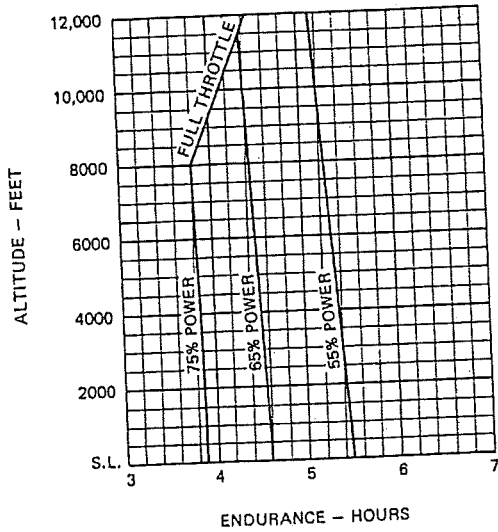


Figure 5-10. Endurance Profile (Sheet 1 of 3)

ESSNA  
MODEL 172N

Aircraft Modified  
Per Penn Yan STC  
2400 lb. gross wt.

SECTION 5  
PERFORMANCE

## ENDURANCE PROFILE

45 MINUTES RESERVE  
50 GALLONS USABLE FUEL

CONDITIONS:  
2400 Pounds  
Recommended Lean Mixture for Cruise  
Standard Temperature

NOTE:  
This chart allows for the fuel used for engine start, taxi, takeoff and climb, and the time during climb.

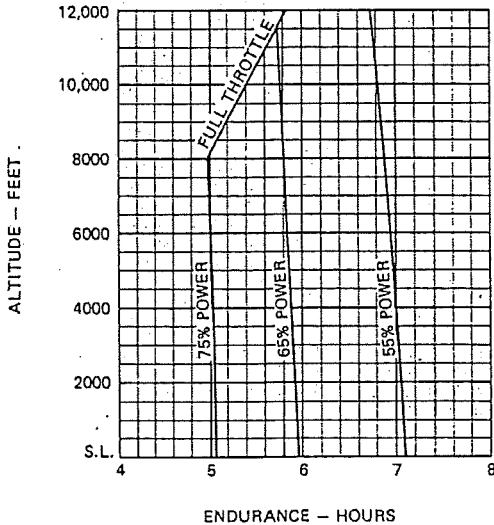


Figure 5-10. Endurance Profile (Sheet 2 of 3)



SECTION 5  
PERFORMANCE

Aircraft Modified  
Per Penn Yan STC  
2400 lb. gross wt.

CESSNA  
MODEL 172N

LANDING DISTANCE

SHORT FIELD

CONDITIONS:  
Flaps 30°  
Power Off  
Maximum Braking  
Payload, Level, Dry Runway  
Zero Wind

- NOTES:  
1. Short field technique as specified in Section 4.  
2. Decrease distances 10% for each 9 knots headwind. For operation with tailwinds up to 10 knots, increase distances by 10% for each 2 knots.  
3. For operation on a dry, grass runway, increase distances by 45% of the "ground roll" figure.  
4. If a landing with flaps up is necessary, increase the approach speed by 7 KIAS and allow for 35% longer distances.

WEIGHT LBS	SPEED AT 50 FT KIAS	PRESS ALT FT	0°C		10°C		20°C		30°C		40°C	
			GRND ROLL FT	TOTAL FT TO CLEAR 50 FT OBS	GRND ROLL FT	TOTAL FT TO CLEAR 50 FT OBS	GRND ROLL FT	TOTAL FT TO CLEAR 50 FT OBS	GRND ROLL FT	TOTAL FT TO CLEAR 50 FT OBS	GRND ROLL FT	TOTAL FT TO CLEAR 50 FT OBS
2400	61	S.L.	510	1235	530	1265	550	1295	570	1325	590	1350
		1000	530	1285	550	1295	570	1330	590	1360	610	1390
		2000	550	1295	570	1330	590	1360	610	1395	635	1425
		3000	570	1330	590	1360	615	1395	635	1430	660	1460
		4000	595	1365	615	1400	635	1430	660	1470	680	1500
		5000	615	1400	640	1435	660	1470	685	1510	705	1540
		6000	640	1435	660	1470	685	1510	710	1540	730	1580
		7000	660	1475	690	1515	710	1550	735	1590	760	1635
		8000	685	1515	715	1555	740	1595	765	1635	790	1675

Fig. 5-11. Landing Distance

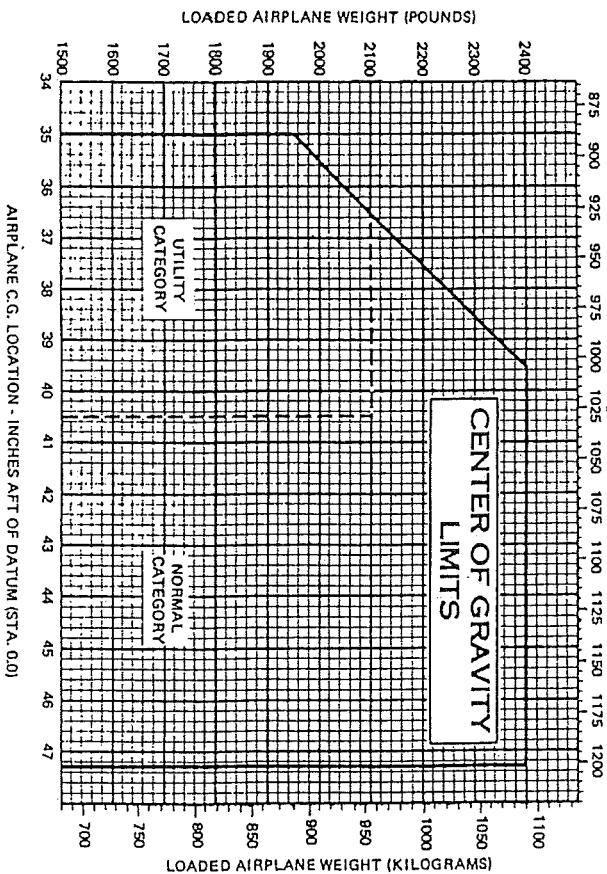


Figure 6-8. Center of Gravity Limits

MAR 01 1989

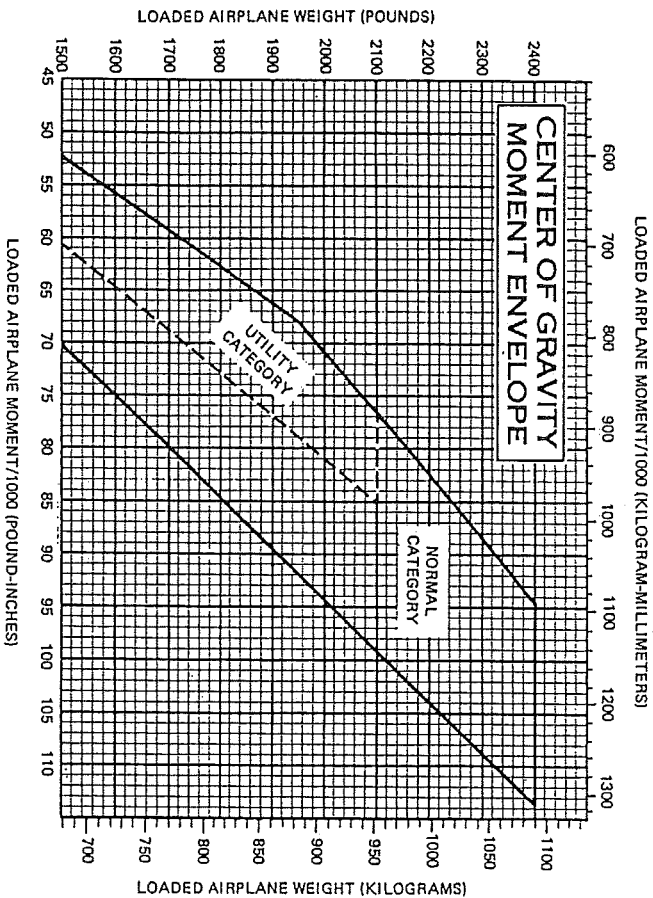


Figure 6-7. Center of Gravity Moment Envelope

MAR 01 1989

Page 10 of 11

Penn Yan Aero Supplemental Airplane Flight Manual & Installation Instructions for the Delat Hawk STC SA-1356GL